



TZ-HR01A Asymmetrical Handrail Light



LED handrail lighting system, suit for standard handrail made by stainless steel and aluminum. Different colors from 2700- 6500K and blue for LEDs are available, IP67 waterproof. Suit for Standard Ø48-63mm handrail wall thickness 1.0-1.5mm for a Ø27 hole



Basic Parameter


TZ-HR01 Handrail Light

Product Number	TZ-HR01A
Cover (Diffuser) material	PMMA
Working Temperature	-40~ + 45°C
IP Class	IP67
Beam Angle	70°

Electrical Parameter


Power	2W
Input Voltage	24V

Flux out:30.97 lm

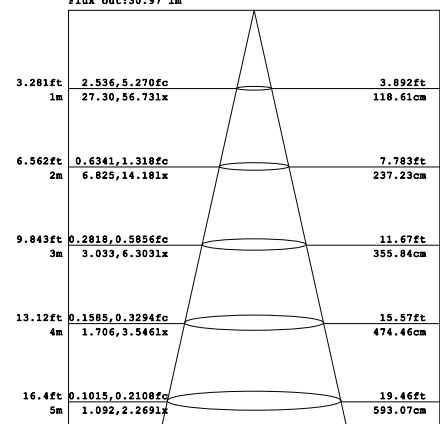

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective Average Illuminance

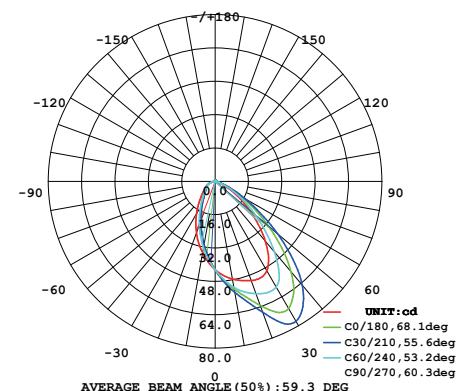

Light Distribution Curve

Optical Parameter

CTT	3000 K
Luminous Flux	118 Lm
Luminous Efficiency	78.7 Lm/W
WCRI	≥80

