


TZ-5050



Dimensions

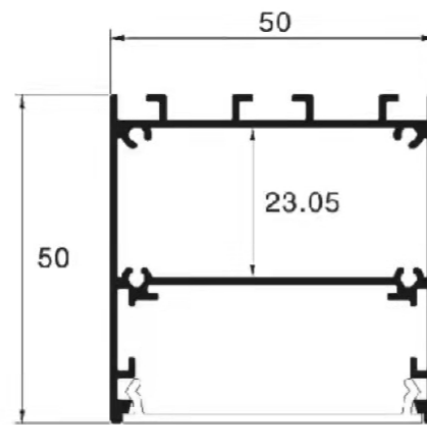

Specification for LED STRIP

Watts	20w/m
Lumens	1800lm/m
CCT	3000K/ 4000K/RGBW
CRI Option	>80 or >90
Mac Adam	3
Lifetime	50,000 hrs
Dimming Option	DALI & Phase cut
Dimension	(W) 50mm x (H) 50mm
Installation	Surface or Suspended
Finish Colour	Black, White Or custom colours

Product Features:

- Surface or Suspended
- Customized lengths possible
- Lighting can be LED strip or OSRAM LED board
- Optional Up/Down lighting available

Specification for OSRAM LED board (UP light uses LED strip)

Watts	30w/m	42w/m	
Module	4000lm/m	7150lm/m	
Up Light Watts (Optional)		9.6W/m	14.4W/m
Up Light Lumens(Optional)		1000lm/m	1500lm/m
CCT	3000K/ 4000K/RGBW		
CRI Option	>80 or >90		
MacAdam	3		
Lifetime	50,000 hrs		
Optional dimming	DALI & Phase Cut		
Dimension	(W) 50mm x (H) 50mm		
Installation	Surface or Suspended		
Finish Colour	Black, White Or Custom Colours		