



LED LINKABLE LINEAR LIGHT



100lm/W

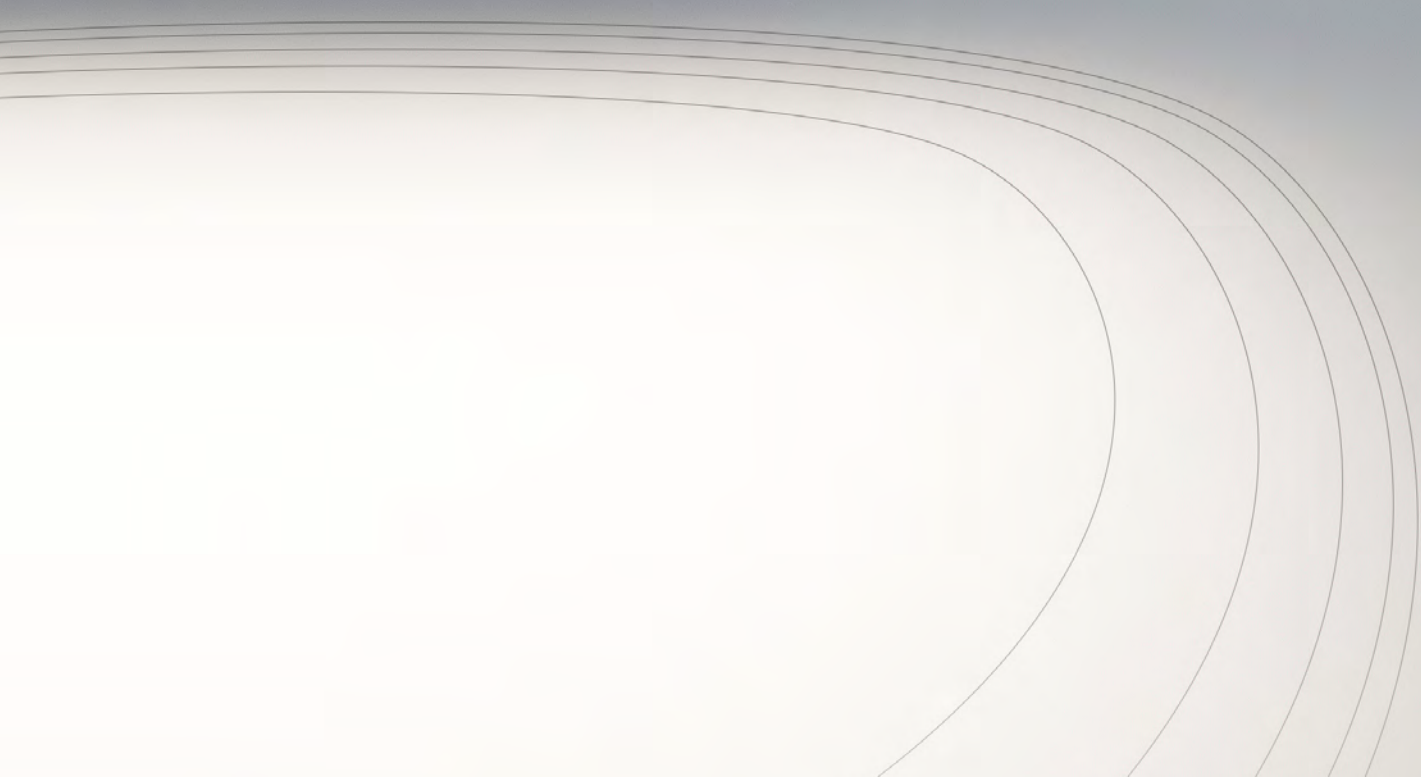

FINISH: White Silver Black **CCT:** 2700K/3000K/4000K/5000K

DIMMING: Triac 1-10V DALI Smart lighting


LED LINEAR LIGHT High quality aluminum case with linkable ends for rapid deployment and ease of installation, high light transmittance PMMA cover. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.

Custom fitting and colours temperature available upon request. UP/DOWN configurations available upon request.

TZ-5575


Installation Type	Surface mount/Suspended
Wattage	36W/60W/90W
Beam Angle	100°
Lumen (lm)	3600/6000/9000
CRI	<90
MacAdam Ellipse	3
Lifespan	50000hrs
Size (WxHmm)	55x75
Length (mm)	1200/2000/3000

DIMENSION

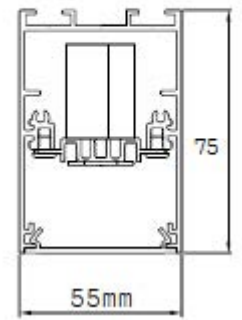


UP/DOWN CONFIGURATIONS AVAILABLE UPON REQUEST


LINKABLE STYLES

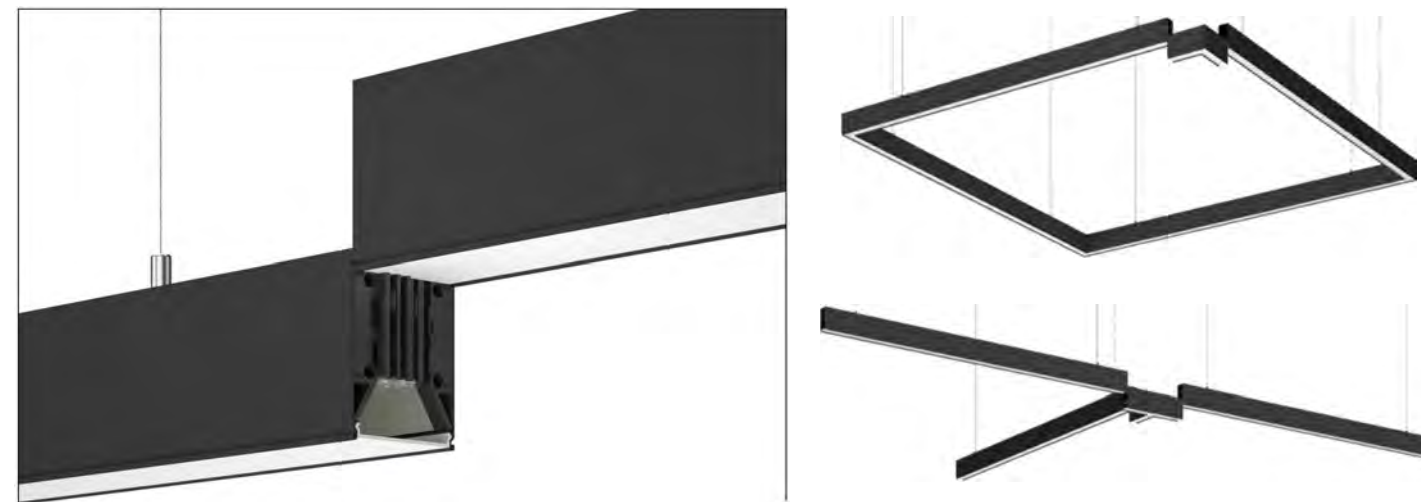

Accessories

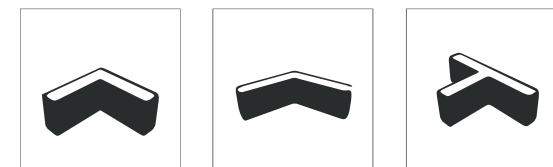

L connector 120° connector T connector

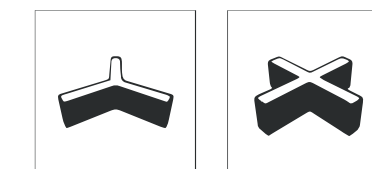

Y connector Cross connector

