



410\*35




MODEL	Watts	CCT	Beam Angle
TZ-DL030/15	15*2.5W	3000K	24°
TZ-DL030/15	15*2.5W	4000K	24°

Chip	Driver	Luminous Flux	Ra	Dimmable	Tilting	Turning	IP
PHILIPS	600mA	15*190 lm	80 90	Optional		30°	IP20

The Indicated Lighting Figures Refer To The Entire Luminaire

**Application:**

Airport, Bedroom, Car Park, Church, Cinema, Gallery, Garage, Hospital, Hotel, Kitchen, Meeting Room, Museum, Office, Restaurant, School, Shopping Mall, Sitting Room

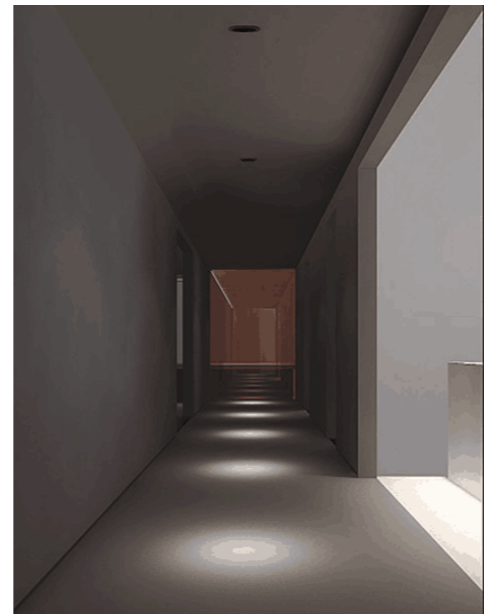

**Photometric Data:**

