

LED DOWNLIGHT KITS



LED

Description:


High output 9W LED downlight, pure aluminium, low glare, to replace existing halogen lighting systems in commercial or residential applications.

Data:


High output 9W LED, 700mA, constant current custom aluminium heat sink, dimmable driver with leading, trailing & universal dimmer




LED DOWNLIGHT KITS

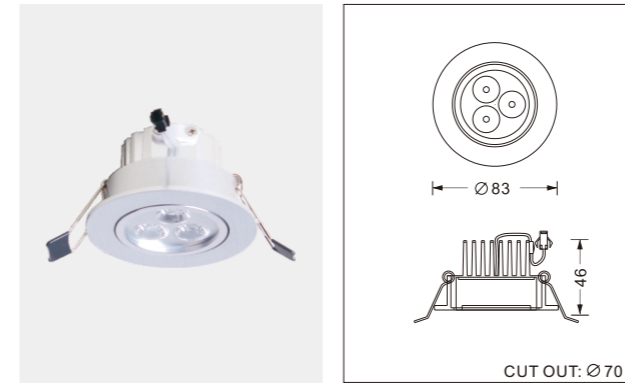

| | | | | | | |
|--------------|--------------|-------------------|----------------------|----------|--|--|
| BRIDGELUX | 700mA | Dimmable | WW=400lm DL=460lm | IP 20 | | |
| MODEL | Watts | LED Colour | Beam angle | | | |
| TZ-DL004/WW | 9W | 3000K | 45° | | | |
| TZ-DL004/DL | 9W | 5000K | 45° | | | |

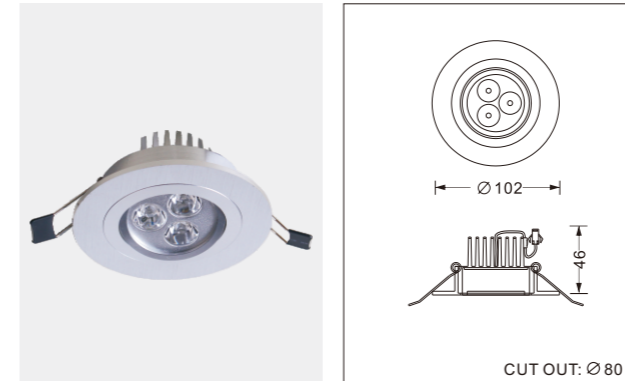

| | | | | | | |
|--------------|--------------|-------------------|----------------------|----------|--|--|
| BRIDGELUX | 700mA | Dimmable | WW=400lm DL=460lm | IP 20 | | |
| MODEL | Watts | LED Colour | Beam angle | | | |
| TZ-DL005/WW | 9W | 3000K | 45° | | | |
| TZ-DL005/DL | 9W | 5000K | 45° | | | |

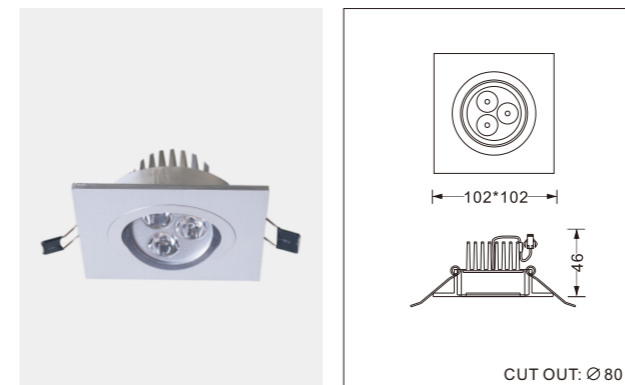

| | | | | | | |
|--------------|--------------|-------------------|----------------------|----------|--|--|
| BRIDGELUX | 700mA | Dimmable | WW=400lm DL=460lm | IP 20 | | |
| MODEL | Watts | LED Colour | Beam angle | | | |
| TZ-DL005A/WW | 9W | 3000K | 45° | | | |
| TZ-DL005A/DL | 9W | 5000K | 45° | | | |

Colour: matt white, black, aluminium

